


FUEL ADDITIVES

FT 500

HEAVY FUEL OIL STABILIZER AND SLUDGE INHIBITOR,
REDUCING COMPATIBILITY PROBLEMS WITH THE NEW VLSFO

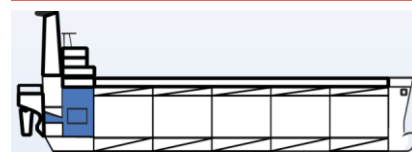

DESCRIPTION

FT 500 is a special mixture that comprises cleaners, dispersants and strong solvents, suitable for any type of fuel. Fuel treatment with **FT 500** will reduce compatibility issues created from the use of new VLSFO. It can effectively improve fuel flow and acts as a fuel stabilizer. Due to its unique composition, it is a very good fuel dispersant and prevents sludge deposition, maintaining the tanks and entire fuel network clean.

APPLICATION

FT 500 in fuel oil tanks for homogenization of the different types of fuel, for better fluidity, dispersion of the existing mud and sludge, breaks down water-fuel emulsions and also optimizes fuel injection resulting to improved combustion.

USE AND DOSING

FT 500 is added to the fuel tank before refuelling at a dose of 1 liter of product per 3000 to 15000 liters of fuel. The dosage depends on the type of fuel and the size of the problem.

PRODUCT PROPERTIES

Compatible with all normally used metals and their alloys. Rubber/synthetic rubber may swell. General Instructions: Avoid spillage, splashing and mishandling. Precautionary measures for body protection are strongly recommended before and during use.

Appearance:	Liquid	pH (undiluted):	N/A
Type:	Organic based	Pour Point:	<-15°C

- ✓ Improves fluidity of heavy fuels
- ✓ Reduce compatibility problems with new VLSFO
- ✓ Break down asphaltenes
- ✓ Disperse fuel residues
- ✓ Improves combustion
- ✓ Fuel stabilizer
- ✓ Protects form corrosion
- ✓ Prevents sludge formation

PROBLEMS SOLVED

- ✓ Engine efficiency
- ✓ Network clogging

APPLICATION AREAS

- ✓ Fuel tanks

PRODUCT CODE: FT 250